

1. .Open a web browser, type **192.168.1.2** in the address bar, and then press **Enter**.



- 2.
3. Enter the current password for the router (the default password is **admin**) and then click **OK**.

A screenshot of a router's login page. The page has a grey header with the word "Login" in orange. Below the header, the text "Default: admin" is displayed. Underneath, the label "Password:" is followed by a text input field containing the word "admin" in red. Below the input field are two buttons: "OK" and "Cancel". The "OK" button is highlighted with a red rectangular border.

4. Click in the Security Key box and type a new Password.

Internet Connection Type PPPoE DHCP

For other connection types, click

Wireless Security Setup

Security Key

Default: 12345678

- 5.

Save/OK/Apply


Your password has been change

*Note this is for Tenda AP's Only


Open a web browser, type **192.168.1.2** in the address bar, and then press **Enter**.



Enter the current **username admin** and password for the router (the default username and password is **admin**) and then click Login.

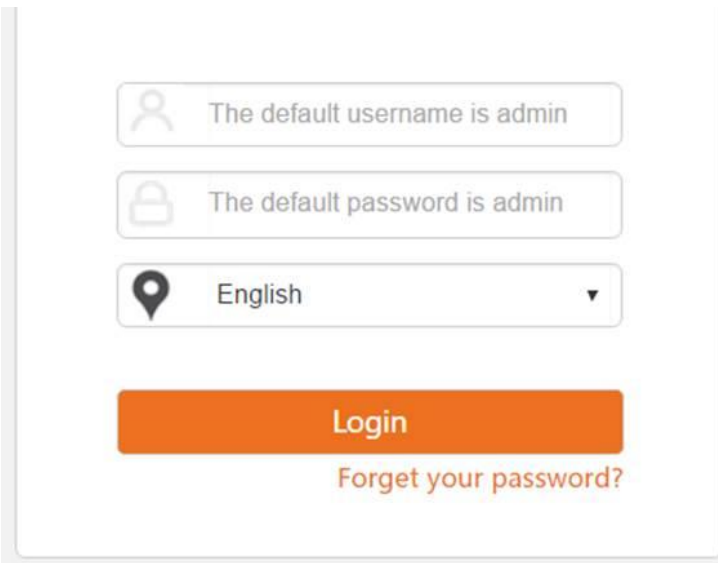

Now that you have logged into the **Tenda** router you should see a page similar to the one below.

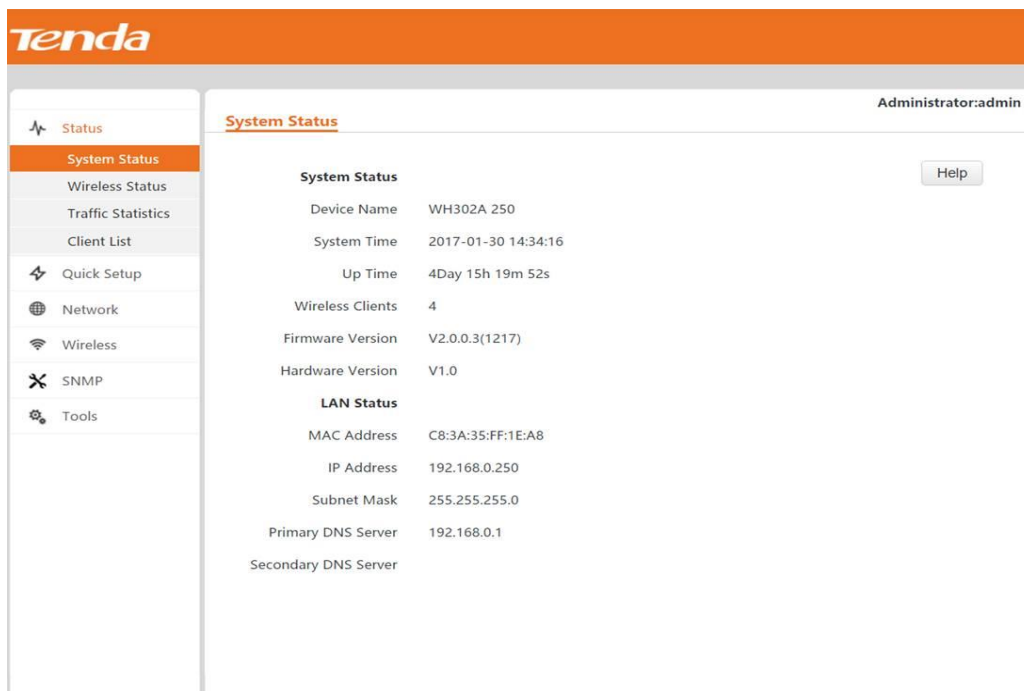

To change the wireless settings click the link in the left sidebar labeled **Wireless**.
Then under that pick the option of **Basic**.

The screenshot shows the Tenda web interface for wireless settings. The left sidebar has a 'Wireless' section with a 'Basic' sub-tab selected. The main content area is titled 'Basic' and shows various configuration options. The 'Key' field is highlighted with a red box, containing the text '1q2w3e4r'. The 'Key Update Interval' is set to 3600 seconds. The 'Save' button is visible at the top right of the settings area.

Status	SSID	UFS_Cardiac	Save
Quick Setup	Enable	<input checked="" type="checkbox"/>	Restore
Network	Hide SSID automatically	<input checked="" type="checkbox"/> (Hide this SSID when exceed client limit)	Help
Wireless	Broadcast SSID	Enable	
Basic	AP isolation	<input checked="" type="radio"/> Disable <input type="radio"/> Enable	
Radio	WMF	<input checked="" type="radio"/> Disable <input type="radio"/> Enable	
Site Survey	Client limit	32 (Range:1-64)	
Advanced	SSID	UFS_Cardiac	
Access Control	Chinese SSID Encode	UTF-8	
QVLAN	Security Mode	WPA2 - PSK	
SNMP	Cipher Type	<input checked="" type="radio"/> AES <input type="radio"/> TKIP <input type="radio"/> TKIP&AES	
Tools	Key	1q2w3e4r	
	Key Update Interval	3600 (Range: 0 or 60—99999 seconds.)	

1. Click in the Key box and type a new Password.

[Click Save Settings](#)

Your password has been change

*Note this is for **Tenda AP's** Only